


MOTOREDUKTOR: NMRV-063-80B14

WIDOK 3D




DANE TECHNICZNE I WYMIARY

GR Size	063
PAM Input PAM flange	80 B14
ACU Output hole shaft (d)	25
VB Double input shaft	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension (d)	-
PFU Output flange position	-
AL Output hole shaft (d)	NO
PAL Output shaft position	-
BR Torque arm	NO
PBR Torque arm position	-
CAP Cover	NO
TIP Motor type	T-Three phase
GRA Motor size	080
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B14
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Standard
MOR Terminal box cover position	1
A	100
AC	158
B	40
B1	6
BB	8
BM	6
BM1	6
D	25(28)
D1	19

DM	19
DM1	19
E	40
F	M6
FF	M6x16
G	95
G1	112
H	72
I	63
K	85
KE	M8x14(8)
L	103
LB	232.5
LL	272.5
M	95
N	80
N1	53
O	8.5
P	110
PM	120
PM1	120
Q	80
R	102
S	8
T	36
T1	21.5
TM	21.8
TM1	21.5
TT	28.3(31.3)
V	50
W	45°

WIDOK 2D

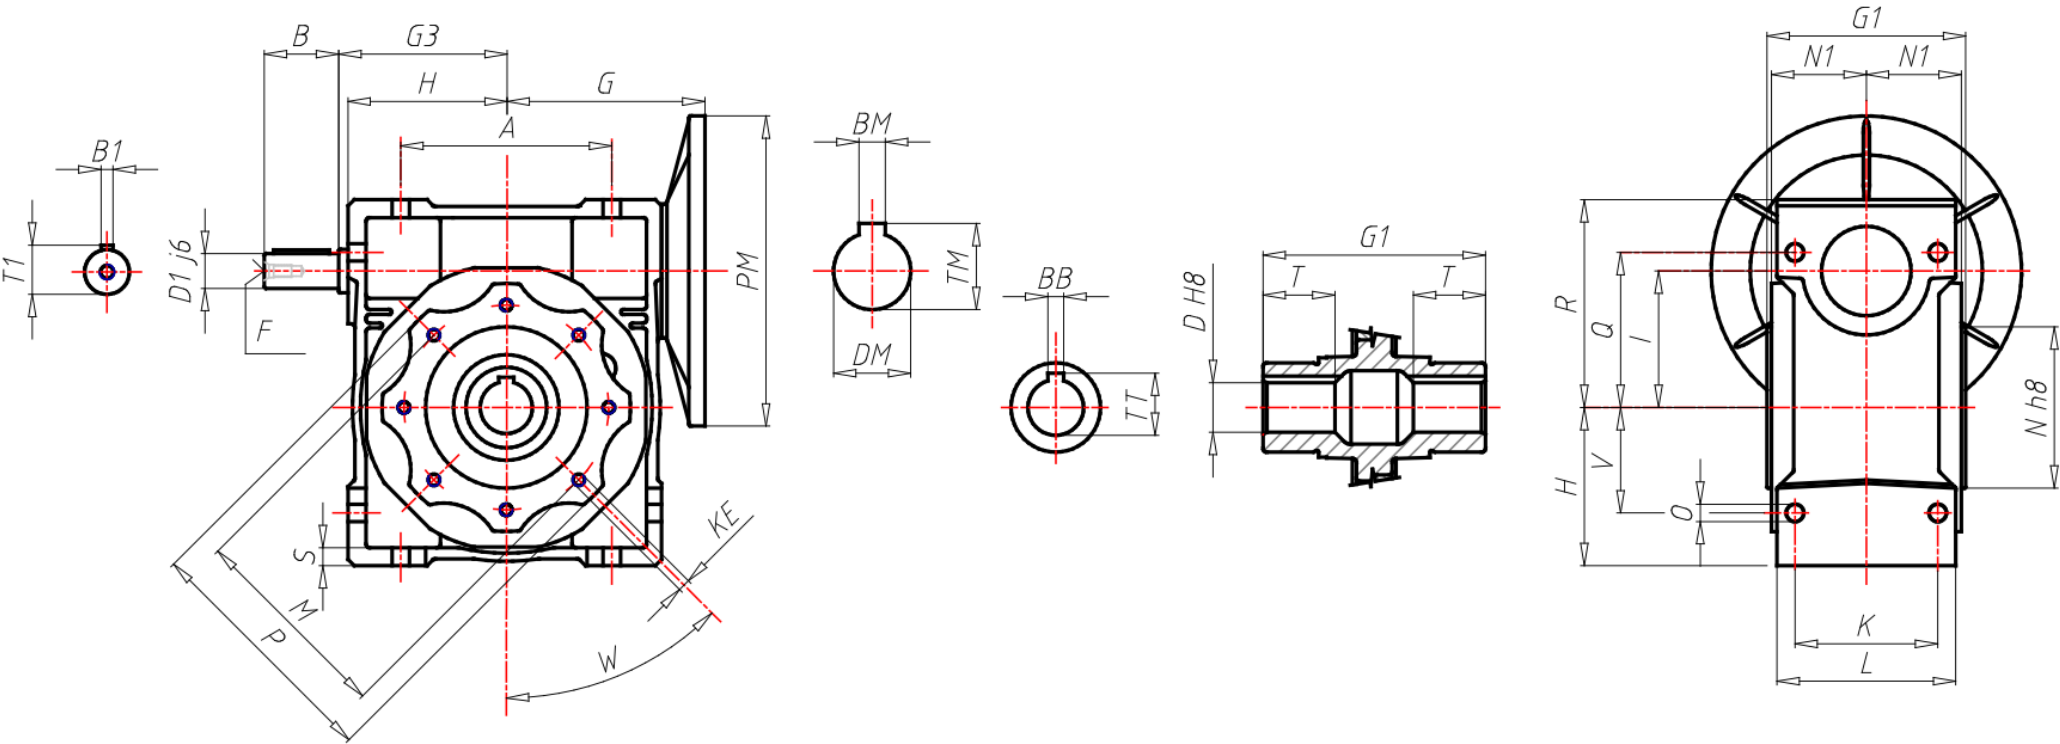

AKCESORIA

